

TOP

The TOP is a stylish air curtain that blends cutting-edge functionality with sleek design. Perfect for modern spaces with contemporary or industrial aesthetics, its smooth front panel and decorative cover makes it a seamless addition to any interior. The front can be customised with logos, lighting, signage, or lettering to suit branding or design needs.

Behind its elegant appearance, the TOP features high-performance tangential fans with low-noise, twisted-profile turbines powered by a 2-speed external rotor motor. It delivers efficient air management while maintaining quiet operation.

The Advanced Pro control comes as standard, with an LCD display, temperature sensor, door contact, 7m cable, and IR remote control. It allows optional automatic and programmable settings, making TOP as smart as it is stylish.


Colours Available

Standard: Bottom Cover White (RAL 9016) | Front Face Grey (RAL 9006)
Options: Stainless Steel or any RAL colour


Fan Options

AC fan - 2 speeds


Mounting Options

Horizontal


Heating Options

Electric
LPHW
Air Only


Max Door Height

2.8m


Lengths Available

1.0m
1.5m
2.0m



AIR ONLY

Model	Max mounting height (m)	Airflow (m³/h)	Ventilation power (W)	Ventilation current (A)	Noise level (dB(A))	Weight (kg)
TOP 1000 A	2.8	1700	80	0.41	35/50	23
TOP 1500 A	2.8	2200	117	0.53	36/51	33
TOP 2000 A	2.8	3200	160	0.82	38/53	43.5

ELECTRICALLY HEATED

Model	Max mounting height (m)	Airflow (m³/h)	Electrical heating capacity (kW)	Power supply	Ventilation power (W)	Ventilation current (A)	Noise level (dB(A))	Weight (kg)
TOP 1000 E	2.8	1700	5.6	400Vx3	80	0.41	35/50	25
TOP 1000 E-9	2.8	1700	9	400Vx3	80	0.41	35/50	26
TOP 1000 E230	2.8	1700	5.6	230Vx1	80	0.41	35/50	25
TOP 1500 E	2.8	2200	9	400Vx3	117	0.53	36/51	36.5
TOP 1500 E230-6	2.8	2200	5.6	230Vx1	117	0.53	36/51	36.5
TOP 1500 E230-9	2.8	2200	9	230Vx1 (*)	117	0.53	36/51	36.5
TOP 2000 E	2.8	3200	11.3	400Vx3	160	0.82	38/53	52.5
TOP 2000 E230	2.8	3200	11.3	230Vx1 (*)	160	0.82	38/53	52.5


(*) 2 separate power supplies.

WATER HEATED

Model	Max mounting height (m)	Airflow (m³/h)	P86 Water heating capacity (kW)	P86 Water pressure drop (Pa)	P64 Water heating capacity (kW)	P64 Water pressure drop (Pa)	Ventilation power (W)	Ventilation current (A)	Noise level (dB(A))	Weight (kg)
TOP1000P86	2.8	1450	8.2	7090	-	-	80	0.41	37/51	25.5
TOP1000P64	2.8	1400	-	-	6.42	6570	80	0.41	37/51	25.5
TOP1500P86	2.8	2175	12.7	7200	-	-	117	0.53	38/52	36.5
TOP1500P64	2.8	2100	-	-	9.85	6210	117	0.53	38/52	36.5
TOP2000P86	2.8	2850	16.7	6550	-	-	160	0.82	40/54	48
TOP2000P64	2.8	2700	-	-	12.83	5560	160	0.82	40/54	48

Water heated: connection pipes 1/2" female. P86 of 2 row coil. P64 of 3 row coil. No model exceeds the 70dB of noise level.

LAYOUTS AND DIMENSIONS

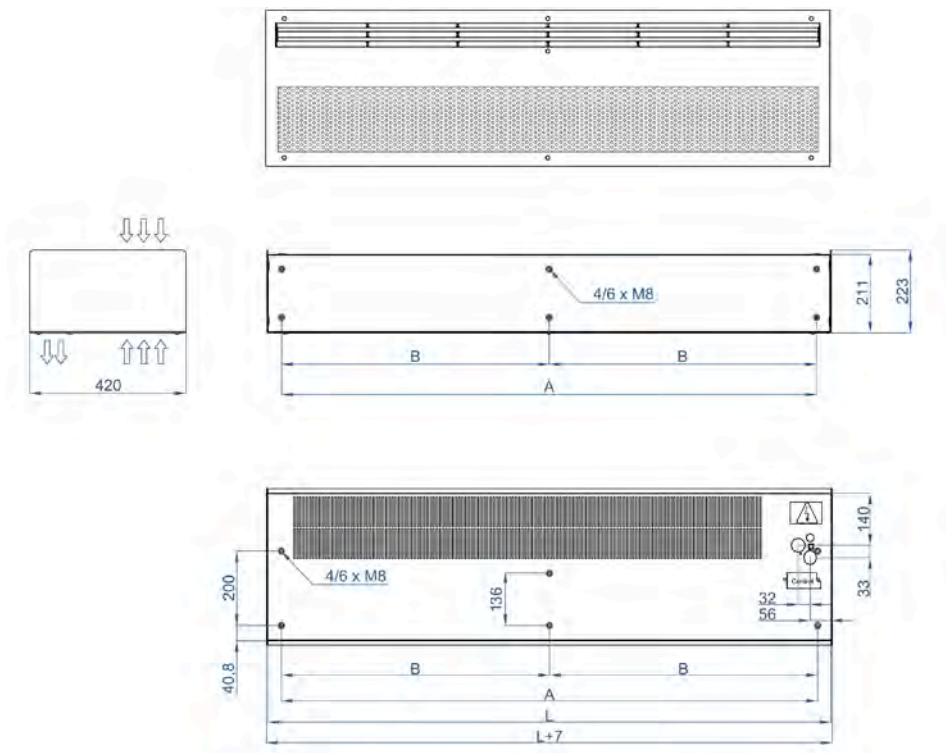

	L	A	B
TOP 1000	1010	938	-
TOP 1500	1510	1438	-
TOP 2000	2010	1938	969

FINISHES AND DETAILS



The front panel is designed to include graphics, logos, illuminated signs, signage, clocks or any other decorative element desired by the customer.

The decorative integral cover is available in any colour from the RAL chart or with stainless steel finish, to blend in with the surrounding decoration.

JS Air Curtains

City Gates, 2-4 Southgate, Chichester, West Sussex, PO19 8DJ, UK

Tel: +44 (0)333 0384240

Email: sales@jsaircurtains.com

www.jsaircurtains.com

